



LED Ceiling Luminaire

Discover our LED ceiling luminaire line equipped with high quality integrated LEDs: they are an energy efficient solution with a life rating of 50 000 hours. This line offers a pleasant, dimmable light making a great solution for any general lighting needs. Thanks to our variety of decorative options you can enjoy direct or indirect lighting fitting seamlessly into any commercial and residential installations.

LED Traditional

02



6", 8"



11", 14"





16", 18", 20", 22"


Order code	Description	Watts (W)	Volts (VAC)	Colour temp. (K)	Lumen output (lm)	CRI	Life L70 (hrs)	Size (in.)	Shape	Finish	Case qty (master)
6", 8"											
66716	LED/CL6/10W/30K/FM/RND/STD	10	120	3 000	785	80	50 000	6	Round	White	24
66717	LED/CL6/10W/40K/FM/RND/STD	10	120	4 000	822	80	50 000	6	Round	White	24
66718	LED/CL8/12W/30K/FM/RND/STD	12	120	3 000	1012	80	50 000	8	Round	White	12
66719	LED/CL8/12W/40K/FM/RND/STD	12	120	4 000	1049	80	50 000	8	Round	White	12
11", 14"											
65598	LED/CL11/15W/27K/FM/RND/STD	15	120	2 700	1 120	80	50 000	11	Round	White	4
66711	CL11/S2/15W/30K/RND/WH/STD	15	120	3 000	1 150	80	50 000	11	Round	White	4
66712	CL11/S2/15W/40K/RND/WH/STD	15	120	4 000	1 164	80	50 000	11	Round	White	4
63300	LED/CL11/15W/30K/FM/SQR/STD	15	120	3 000	1 020	80	50 000	11	Square	White	4
63301	LED/CL11/15W/40K/FM/SQR/STD	15	120	4 000	1 123	80	50 000	11	Square	White	4
66713	LED/CL14/25W/27K/FM/RND/STD	25	120	2 700	1 718	80	50 000	14	Round	White	4
66714	CL14/S2/25W/30K/RND/WH/STD	25	120	3 000	1 783	80	50 000	14	Round	White	4
66715	CL14/S2/25W/40K/RND/WH/STD	25	120	4 000	1 851	80	50 000	14	Round	White	4
63304	LED/CL14/25W/30K/FM/SQR/STD	25	120	3 000	1 723	80	50 000	14	Square	White	4
63305	LED/CL14/25W/40K/FM/SQR/STD	25	120	4 000	1 844	80	50 000	14	Square	White	4
16", 18", 20", 22"											
65665	LED/CL16/26W/30K/FM/RND/STD	26	120	3 000	2 034	80	50 000	16	Round	White	4
65666	LED/CL16/26W/40K/FM/RND/STD	26	120	4 000	2 170	80	50 000	16	Round	White	4
65667	LED/CL18/32W/30K/FM/RND/STD	32	120	3 000	2 644	80	50 000	18	Round	White	4
65668	LED/CL18/32W/40K/FM/RND/STD	32	120	4 000	2 898	80	50 000	18	Round	White	4
65661	LED/CL20/37W/30K/FM/RND/STD	37	120	3 000	3 098	80	50 000	20	Round	White	2
65662	LED/CL20/37W/40K/FM/RND/STD	37	120	4 000	3 144	80	50 000	20	Round	White	2
65663	LED/CL22/40W/30K/FM/RND/STD	40	120	3 000	3 424	80	50 000	22	Round	White	2
65664	LED/CL22/40W/40K/FM/RND/STD	40	120	4 000	3 534	80	50 000	22	Round	White	2

Replacement Lenses

Order code	Description	Replacement for
64867	LED/CL6/LENS/RND/STD	66716, 66717
64868	LED/CL8/LENS/RND/STD	66718, 66719
64869	LED/CL11/LENS/RND/STD	66711, 66712, 65598
64877	LED/CL11/LENS/SQR/STD	63300, 63301
64878	LED/CL14/LENS/RND/STD	66714, 66715, 66713
64879	LED/CL14/LENS/SQR/STD	63304, 63305



11" : 3" (76.2 mm)
14" : 3" (76.2 mm)
16" : 4 3/8" (111 mm)
18" : 4 3/16" (106 mm)
20" : 4 11/32" (110 mm)
22" : 4 3/16" (106 mm)




Shade

Our shades create a warm and elegant atmosphere. They complement our 11" and 14" LED traditional ceiling luminaires and are offered in assorted materials and textures which allows you to create a specific ambient style.

- Drum profile
- Materials and textures available: silk type, cork, wood, and linen type



Order code	Description	Shape	Material	Finish	Case qty (master)
Compatible for 11" traditional ceiling luminaires					
65681	LED/CL11/SHADE/RND/WHITE/STD	Round	Linen type	White	6
65682	LED/CL11/SHADE/RND/BEIGE/STD	Round	Linen type	Beige	6
65683	LED/CL11/SHADE/RND/BLACK/STD	Round	Linen type	Black	6
65684	LED/CL11/SHADE/RND/DGRAY/STD	Round	Linen type	Grey	6
65685	LED/CL11/SHADE/RND/WOOD/STD	Round	Wood	Wood	6
65686	LED/CL11/SHADE/RND/CORK/STD	Round	Cork	Cork	6
65687	LED/CL11/SHADE/RND/WFROST/STD	Round	Silk type	White frosted	6
66044	LED/CL11/SHADE/RND/BRNW/STD	Round	Wood	Barn wood	6
Compatible for 14" traditional ceiling luminaires					
65688	LED/CL14/SHADE/RND/WHITE/STD	Round	Linen type	White	6
65689	LED/CL14/SHADE/RND/BEIGE/STD	Round	Linen type	Beige	6
65690	LED/CL14/SHADE/RND/BLACK/STD	Round	Linen type	Black	6
65691	LED/CL14/SHADE/RND/DGRAY/STD	Round	Linen type	Grey	6
65692	LED/CL14/SHADE/RND/WOOD/STD	Round	Wood	Wood	6
65693	LED/CL14/SHADE/RND/CORK/STD	Round	Cork	Cork	6
65694	LED/CL14/SHADE/RND/WFROST/STD	Round	Silk type	White Frosted	6
66045	LED/CL14/SHADE/RND/BRNW/STD	Round	Wood	Barn wood	6

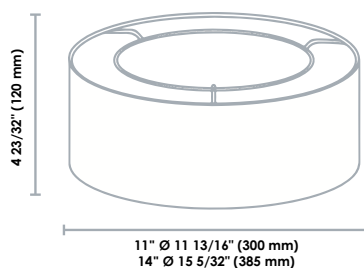

LED Brushed Nickel

02



6", 8"




11", 14"

Order code	Description	Watts (W)	Volts (VAC)	Colour temp. (K)	Lumen output (lm)	CRI	Life L70 (hrs)	Finish	Case qty (master)
6" Round									
64247	LED/CLBN5.75/10W/30K/FM/RND/STD	10	120	3 000	640	80	50 000	Brushed nickel	24
64248	LED/CLBN5.75/10W/40K/FM/RND/STD	10	120	4 000	660	80	50 000	Brushed nickel	24
8" Round									
66722	CL8/S2/12W/30K/RND/BN/STD	12	120	3 000	951	80	50 000	Brushed nickel	12
64250	LED/CLBN7.75/12W/40K/FM/RND/STD	12	120	4 000	784	80	50 000	Brushed nickel	12
11" Round									
64095	LED/CLBN11/15W/30K/FM/RND/STD	15	120	3 000	1 246	80	50 000	Brushed nickel	4
64096	LED/CLBN11/15W/40K/FM/RND/STD	15	120	4 000	1 284	80	50 000	Brushed nickel	4
14" Round									
64099	LED/CLBN14/25W/30K/FM/RND/STD	25	120	3 000	2 041	80	50 000	Brushed nickel	4
64100	LED/CLBN14/25W/40K/FM/RND/STD	25	120	4 000	2 102	80	50 000	Brushed nickel	4


Replacement Lenses

Order code	Description	Replacement for
64880	LED/CLBN5.75/LENS/RND/STD	64247, 64248
64881	LED/CLBN7.75/LENS/RND/STD	64249, 64250
64882	LED/CLBN11/LENS/RND/STD	64095, 64096
64883	LED/CLBN14/LENS/RND/STD	64099, 64100

6" : 2 15/32" (63 mm)
8" : 3 7/32" (81.5 mm)



11" : 3 5/32" (80 mm)
14" : 3 7/16" (87 mm)



DAMP



DIMMABLE



5 YEARS WARRANTY



UL US



ENERGY STAR

Lumen values are derived from photometric testing.
For a complete list of compatible dimmers and ENERGY STAR qualified products, please visit www.standardpro.com

LED Double Ring

02



Brushed nickel




Black



Chrome

12", 14", 16"

Order code	Description	Watts (W)	Volts (VAC)	Colour temp. (K)	Lumen output (lm)	CRI	Life L70 (hrs)	Finish	Case qty (master)
12" Round									
65605	LED/CLDR/BN/12/20W/30K/FM/RND/STD	20	120	3 000	1 525	80	50 000	Brushed nickel	4
66862	CLDR12/S2/20W/40K/RND/BN/STD	20	120	4 000	1464	80	50 000	Brushed nickel	4
66855	CLDR12/S2/20W/30K/RND/BK/STD	20	120	3 000	1 458	80	50 000	Black	4
66858	CLDR12/S2/20W/30K/RND/CH/STD	20	120	3 000	1 458	80	50 000	Chrome	4
14" Round									
66863	CLDR14/S2/25W/30K/RND/BN/STD	25	120	3 000	1 860	80	50 000	Brushed nickel	4
66864	CLDR14/S2/25W/40K/RND/BN/STD	25	120	4 000	1 880	80	50 000	Brushed nickel	4
66856	CLDR14/S2/25W/30K/RND/BK/STD	25	120	3 000	1 860	80	50 000	Black	4
66859	CLDR14/S2/25W/30K/RND/CH/STD	25	120	3 000	1 860	80	50 000	Chrome	4
16" Round									
65611	LED/CLDR/BN/16/26W/30K/FM/RND/STD	26	120	3 000	2 049	80	50 000	Brushed nickel	2
66866	CLDR16/S2/26W/40K/RND/BN/STD	26	120	4 000	1 950	80	50 000	Brushed nickel	2
66857	CLDR16/S2/26W/30K/RND/BK/STD	26	120	3 000	1 923	80	50 000	Black	2
66860	CLDR16/S2/26W/30K/RND/CH/STD	26	120	3 000	1 923	80	50 000	Chrome	2

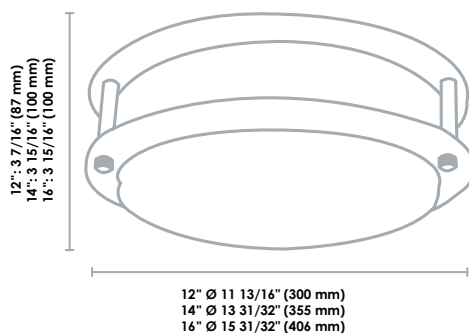

DAMP



DIMMABLE



5 YEARS WARRANTY



UL US



ENERGY STAR

Lumen values are derived from photometric testing.
For a complete list of compatible dimmers and ENERGY STAR qualified products, please visit www.standardpro.com



LED Edge-Lit

The LED Edge-Lit ceiling luminaire has a very slim design for a modern and minimalist look. These thin luminaires are equipped with an LED edge-lit technology to eliminate hot spots on the surface and provide a crisp and even light. Offered in a variety of shapes and sizes, it will fit any application.

- Easy twist-lock installation
- No visible screws
- Safety cable included
- Frost polycarbonate lens





6", 8", 12"



6", 8", 12"

Order code	Description	Watts (W)	Volts (VAC)	Colour temp. (K)	Lumen output (lm)	CRI	Life L70 (hrs)	Finish	Case qty (master)
6" Round									
65454	LED/CL6/EDGE LIT/11W/30K/FM/RND/WH/STD	11	120	3 000	855	80	50 000	White	20
65455	LED/CL6/EDGE LIT/11W/40K/FM/RND/WH/STD	11	120	4 000	896	80	50 000	White	20
6" Square									
65460	LED/CL6/EDGE LIT/11W/30K/FM/SQR/WH/STD	11	120	3 000	852	80	50 000	White	20
65461	LED/CL6/EDGE LIT/11W/40K/FM/SQR/WH/STD	11	120	4 000	893	80	50 000	White	20
8" Round									
65456	LED/CL8/EDGE LIT/14W/30K/FM/RND/WH/STD	14	120	3 000	1 066	80	50 000	White	20
65457	LED/CL8/EDGE LIT/14W/40K/FM/RND/WH/STD	14	120	4 000	1 118	80	50 000	White	20
8" Square									
65462	LED/CL8/EDGE LIT/14W/30K/FM/SQR/WH/STD	14	120	3 000	1 065	80	50 000	White	20
65463	LED/CL8/EDGE LIT/14W/40K/FM/SQR/WH/STD	14	120	4 000	1 115	80	50 000	White	20
12" Round									
65458	LED/CL12/EDGE LIT/22W/30K/FM/RND/WH/STD	22	120	3 000	1 647	80	50 000	White	10
65459	LED/CL12/EDGE LIT/22W/40K/FM/RND/WH/STD	22	120	4 000	1 725	80	50 000	White	10
12" Square									
65464	LED/CL12/EDGE LIT/22W/30K/FM/SQR/WH/STD	22	120	3 000	1 636	80	50 000	White	10
65465	LED/CL12/EDGE LIT/22W/40K/FM/SQR/WH/STD	22	120	4 000	1 713	80	50 000	White	10

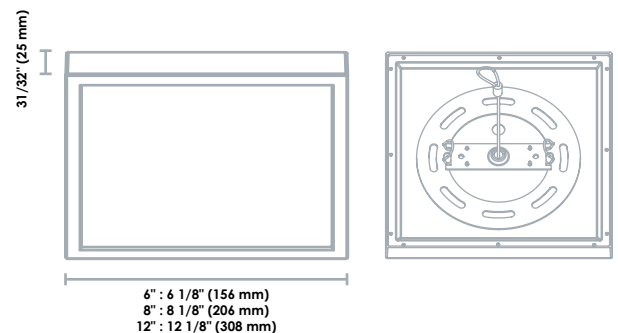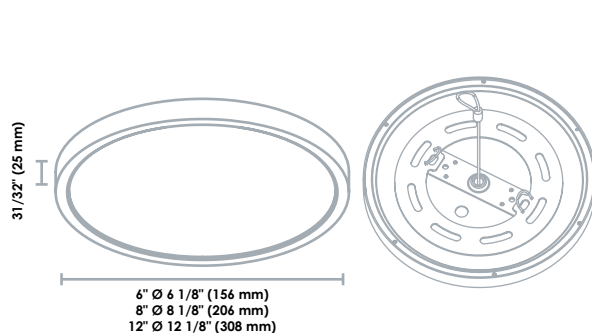

Lumen values are derived from photometric testing.
For a complete list of compatible dimmers and ENERGY STAR qualified products, please visit www.standardpro.com



DIMMABLE



WET



5 YEARS WARRANTY



ETL Intertek




ENERGY STAR


LED Tri-Level

Dimming technology maximizes energy savings by intelligently managing illumination levels to avoid wasted energy. The luminaire is controlled by a motion sensor that triggers light levels from low to high upon occupancy, and users can adjust the luminaire's standby light levels by percentage of light, lux and dimming delay of full output.


Perfect for lighting applications that require illumination 24/7, this technology represents a significant energy savings opportunity.




1. When there is sufficient natural light and a presence is detected the luminaire will not turn on, it will stay dimmed.



2. With insufficient natural light, the light is switched on automatically when presence is detected; it will remain on at 100% during the motion hold-time.



3. If no presence is detected the light dims to 10% and 30% (options) stand-by levels after the hold time.

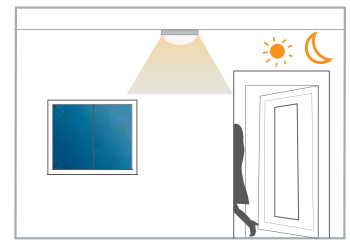

4. Optional: Light switches off automatically after the stand-by period has elapsed.

Order code	Description	Watts (W)	Volts (V)	Colour temp. (K)	Lumen output (lm)	CRI	Life L70 (hrs)	Sensor type	Finish	Case qty (master)
------------	-------------	-----------	-----------	------------------	-------------------	-----	----------------	-------------	--------	-------------------

11" Round

65723	LED/CL11TLEV/12W/40K/FM/RND/STD	12	120	4 000	1 020	80	50 000	Microwave	White	4
67068	CL11/TLEV/15W/40K/RND/BN/STD	15	120	4 000	1 148	80	50 000	Microwave	Brush nickel	4

