

GLASHÜTTE LIMBURG**Product data sheet****Pendant luminaire****50 246.2**

Project · Reference number

Date

Application

LED pendant luminaire with hand-blown opal glass and metal housing for non-glare light deflected downwards.

The used LED technique offers durability and optimal light output with low power consumption at the same time.

Product description

LED pendant luminaire »STUDIO LINE«

Aluminium luminaire housing,

velvet black enamel finish,

Inside hue matt aluminium

Hand-blown opal glass, satin matt, with bayonet closure

Mounting plate with 2 fixing

holes $\varnothing$ 4.6 mm · 42 mm spacing

Black flex suspension 3×0.75 □

Connecting terminal 2.5 □

Earth conductor connection

LED power supply unit

220-240 V ~ 50-60 Hz

Safety class I

CE – Conformity mark

Weight: 2.2 kg

Lamp

Module connected wattage 11.9 W

Luminaire connected wattage 15.6 W

Rated temperature $t_a = 25$ °C

Ambient temperature $t_{a \max} = 30$ °C

Module designation LED-0509/930

Colour temperature 3000 K

Colour rendering index $R_a > 90$

Module luminous flux 1515 lm

Luminaire luminous flux 692 lm

Luminaire luminous efficiency 44,4 lm/W

Lifetime of the LED

Ambient temperature $t_a = 15$ °C

– at 50,000 h: L90B10

– at > 500,000 h: L70B50

Ambient temperature $t_a = 25$ °C

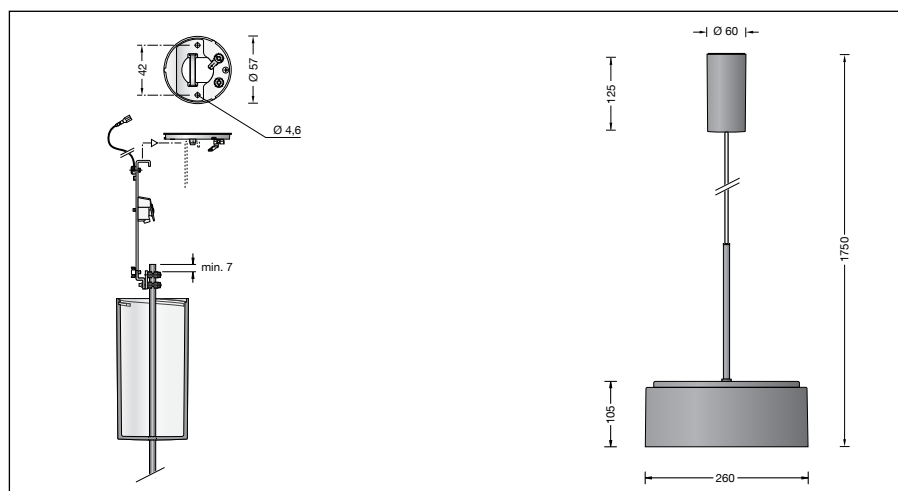
– at 50,000 h: L90B10

– at > 500,000 h: L70B50

max. ambient temperature $t_a = 30$ °C

– at 50,000 h: L90B10

– at 496,000 h: L70B50


www.glashuette-limburg.com
**Article No. 50 246.2**

Interior colour options

- matt aluminium
- matt brass
- matt copper

Code number **.2**

Code number **.4**

Code number **.6**