

```

REGRESSION
/MISSING LISTWISE
/STATISTICS COEFF OUTS R ANOVA ZPP
/CRITERIA=PIN(.05) POUT(.10)
/NOORIGIN
/DEPENDENT Time
/METHOD=ENTER Depressed
/SCATTERPLOT=(*ZRESID ,*ZPRED)
/RESIDUALS HISTOGRAM(ZRESID) NORMPROB(ZRESID).

```

Regression

Notes

Output Created		15-APR-2020 20:08:...
Comments		
Input	Data	/Users/nathanielstafford /OneDrive - University of Central Oklahoma/Teaching/PSY 3713 Spring 2020/Final Project/Final_Project.sav
	Active Dataset	DataSet1
	Filter	<none>
	Weight	<none>
	Split File	<none>
	N of Rows in Working Data File	94
Missing Value Handling	Definition of Missing	User-defined missing values are treated as missing.
	Cases Used	Statistics are based on cases with no missing values for any variable used.
Syntax		REGRESSION /MISSING LISTWISE /STATISTICS COEFF OUTS R ANOVA ZPP /CRITERIA=PIN(.05) POUT(.10) /NOORIGIN /DEPENDENT Time /METHOD=ENTER Depressed /SCATTERPLOT= (*ZRESID ,*ZPRED) /RESIDUALS HISTOGRAM(ZRESID) NORMPROB(ZRESID).

Notes

Resources	Processor Time	00:00:00.60
	Elapsed Time	00:00:01.00
	Memory Required	2768 bytes
	Additional Memory Required for Residual Plots	896 bytes

Variables Entered/Removed^a

Model	Variables Entered	Variables Removed	Method
1	Depressed ^b	.	Enter

a. Dependent Variable: Time

b. All requested variables entered.

Model Summary^b

Model	R	R Square	Adjusted R Square	Std. Error of the Estimate
1	.140 ^a	.020	-.035	9.70047

a. Predictors: (Constant), Depressed

b. Dependent Variable: Time

ANOVA^a

Model		Sum of Squares	df	Mean Square	F	Sig.
1	Regression	34.015	1	34.015	.361	.555 ^b
	Residual	1693.785	18	94.099		
	Total	1727.800	19			

a. Dependent Variable: Time

b. Predictors: (Constant), Depressed

Coefficients^a

Model		Unstandardized Coefficients		Standardized Coefficients	t	Sig.
		B	Std. Error	Beta		
1	(Constant)	18.478	11.226		1.646	.117
	Depressed	.085	.141	.140	.601	.555

Coefficients^a

Model		Correlations		
		Zero-order	Partial	Part
1	(Constant)			
	Depressed	.140	.140	.140


a. Dependent Variable: Time

Residuals Statistics^a

	Minimum	Maximum	Mean	Std. Deviation	N
Predicted Value	22.7200	26.9624	25.1000	1.33801	20
Residual	-16.84122	13.05577	.00000	9.44175	20
Std. Predicted Value	-1.779	1.392	.000	1.000	20
Std. Residual	-1.736	1.346	.000	.973	20


a. Dependent Variable: Time


Charts

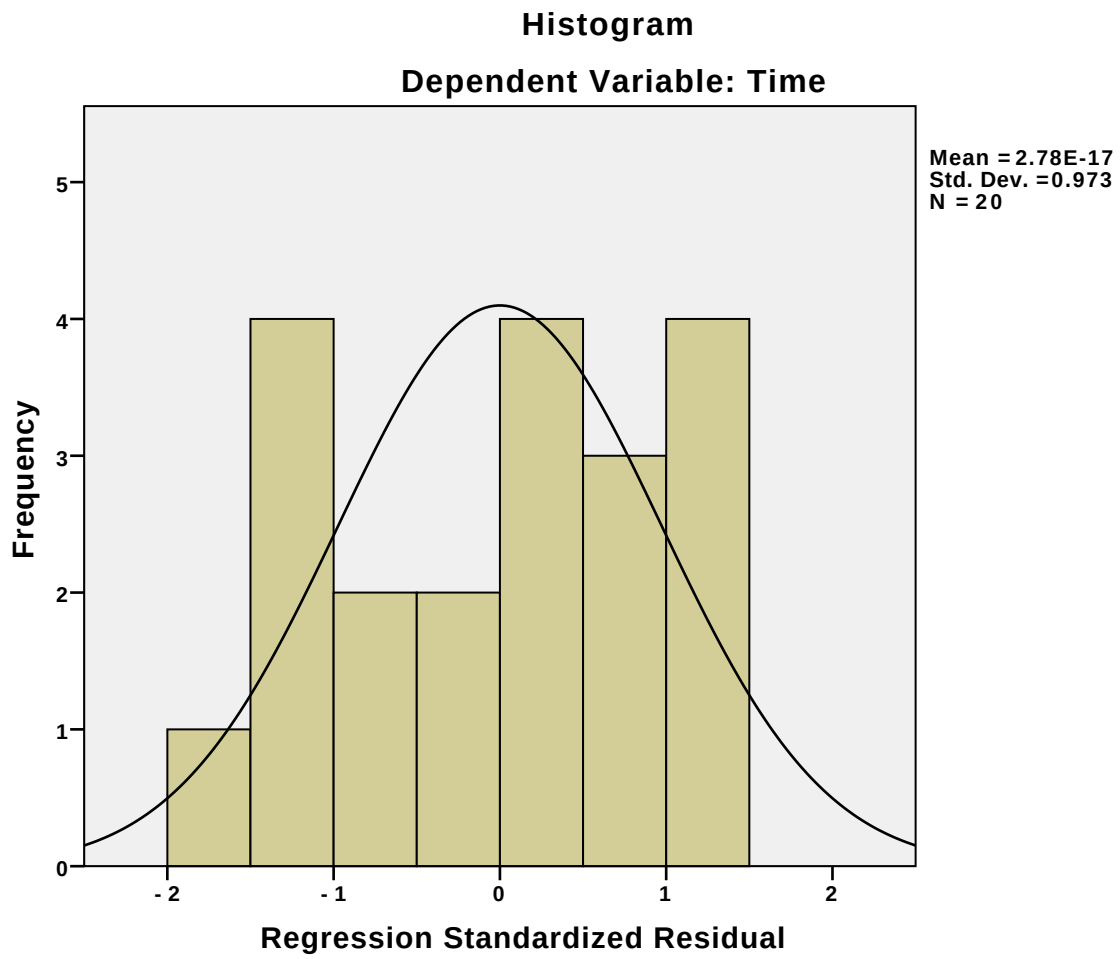

Normal P-P Plot of Regression Standardized Residual

Dependent Variable: Time

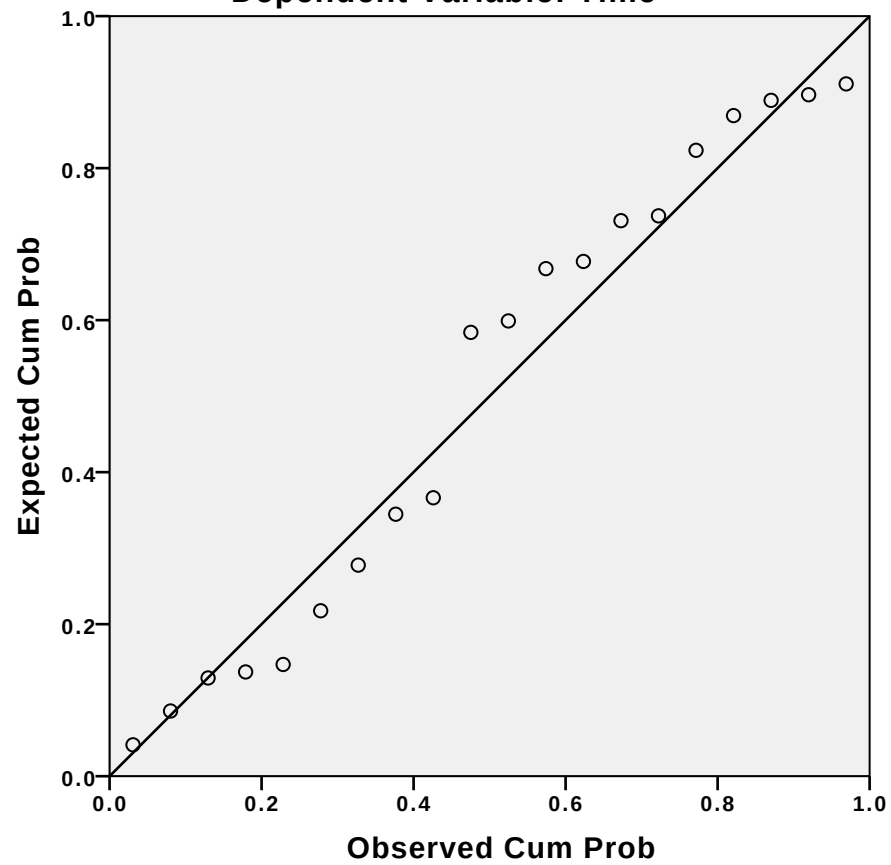

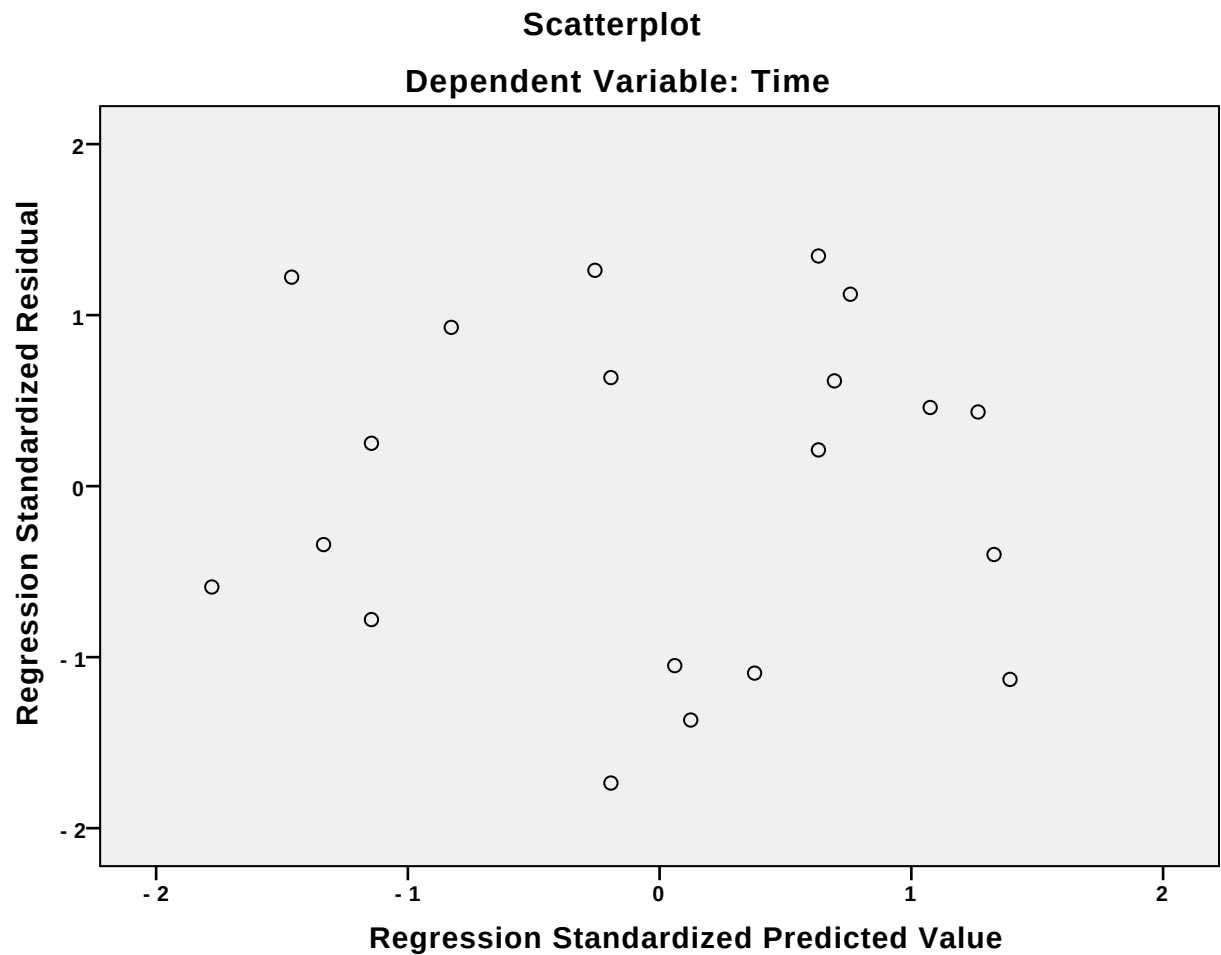

```

REGRESSION
  /MISSING LISTWISE
  /STATISTICS COEFF OUTS R ANOVA ZPP
  /CRITERIA=PIN(.05) POUT(.10)
  /NOORIGIN
  /DEPENDENT Hostility
  /METHOD=ENTER Depressed
  /SCATTERPLOT=(*ZRESID ,*ZPRED)
  /RESIDUALS HISTOGRAM(ZRESID) NORMPROB(ZRESID) .

```

Regression

Notes

Output Created		15-APR-2020 20:08:...
Comments		
Input	Data	/Users/nathanielstafford/OneDrive - University of Central Oklahoma/Teaching/PSY 3713 Spring 2020/Final Project/Final_Project.sav
	Active Dataset	DataSet1
	Filter	<none>
	Weight	<none>
	Split File	<none>
	N of Rows in Working Data File	94
Missing Value Handling	Definition of Missing	User-defined missing values are treated as missing.
	Cases Used	Statistics are based on cases with no missing values for any variable used.
Syntax		REGRESSION /MISSING LISTWISE /STATISTICS COEFF OUTS R ANOVA ZPP /CRITERIA=PIN(.05) POUT(.10) /NOORIGIN /DEPENDENT Hostility /METHOD=ENTER Depressed /SCATTERPLOT= (*ZRESID ,*ZPRED) /RESIDUALS HISTOGRAM(ZRESID) NORMPROB(ZRESID).
Resources	Processor Time	00:00:00.54
	Elapsed Time	00:00:01.00
	Memory Required	2768 bytes
	Additional Memory Required for Residual Plots	896 bytes

Variables Entered/Removed^a

Model	Variables Entered	Variables Removed	Method
1	Depressed ^b	.	Enter

a. Dependent Variable: Hostility

b. All requested variables entered.

Model Summary^b

Model	R	R Square	Adjusted R Square	Std. Error of the Estimate
1	.956 ^a	.914	.909	.95847

a. Predictors: (Constant), Depressed

b. Dependent Variable: Hostility

ANOVA^a

Model		Sum of Squares	df	Mean Square	F	Sig.
1	Regression	176.264	1	176.264	191.870	.000 ^b
	Residual	16.536	18	.919		
	Total	192.800	19			

a. Dependent Variable: Hostility

b. Predictors: (Constant), Depressed

Coefficients^a

Model		Unstandardized Coefficients		Standardized Coefficients	t	Sig.
		B	Std. Error	Beta		
1	(Constant)	-9.675	1.109		-8.722	.000
	Depressed	.193	.014	.956	13.852	.000

Coefficients^a

Model		Correlations		
		Zero-order	Partial	Part
1	(Constant)			
	Depressed	.956	.956	.956

a. Dependent Variable: Hostility

Residuals Statistics^a


	Minimum	Maximum	Mean	Std. Deviation	N
Predicted Value	-.0177	9.6395	5.4000	3.04583	20
Residual	-1.61776	1.32619	.00000	.93291	20
Std. Predicted Value	-1.779	1.392	.000	1.000	20
Std. Residual	-1.688	1.384	.000	.973	20

a. Dependent Variable: Hostility

Charts


Histogram


Dependent Variable: Hostility

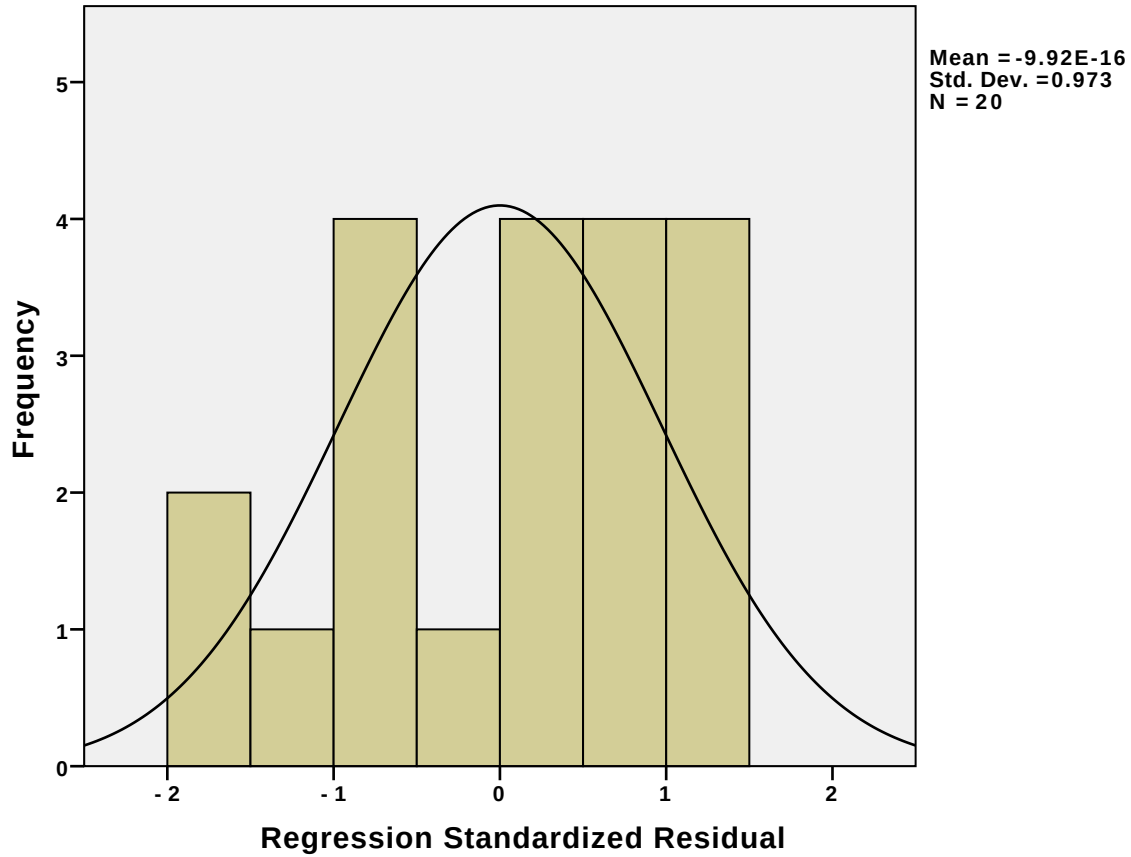

Normal P-P Plot of Regression Standardized Residual

Dependent Variable: Hostility

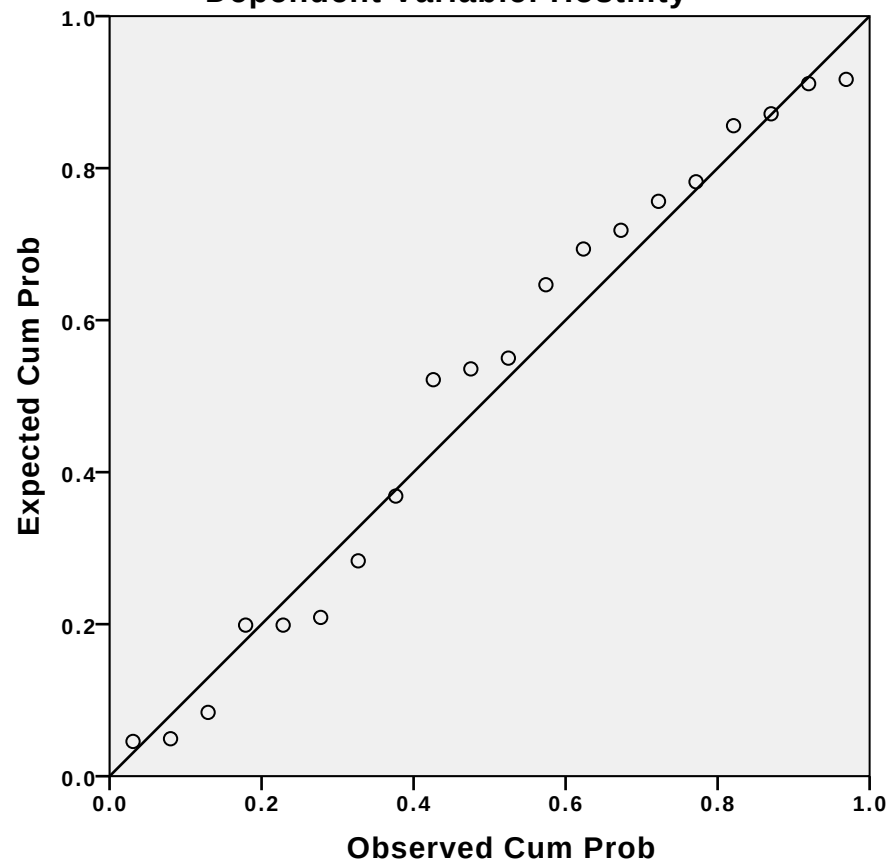

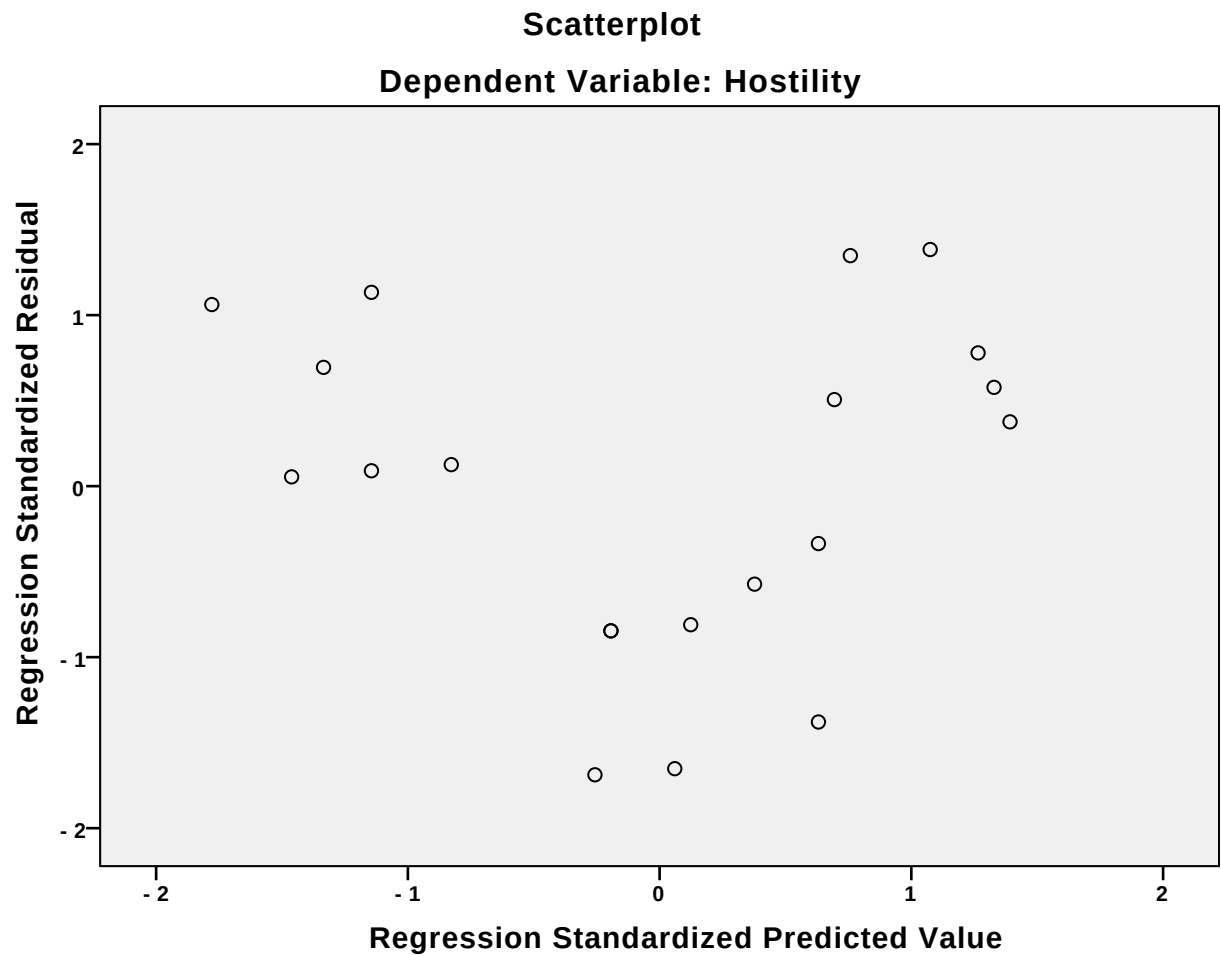

```

REGRESSION
  /MISSING LISTWISE
  /STATISTICS COEFF OUTS R ANOVA ZPP
  /CRITERIA=PIN(.05) POUT(.10)
  /NOORIGIN
  /DEPENDENT Gullibility
  /METHOD=ENTER Depressed
  /SCATTERPLOT=(*ZRESID ,*ZPRED)
  /RESIDUALS HISTOGRAM(ZRESID) NORMPROB(ZRESID) .

```

Regression

Notes

Output Created		15-APR-2020 20:09:...
Comments		
Input	Data	/Users/nathanielstafford/OneDrive - University of Central Oklahoma/Teaching/PSY 3713 Spring 2020/Final Project/Final_Project.sav
	Active Dataset	DataSet1
	Filter	<none>
	Weight	<none>
	Split File	<none>
	N of Rows in Working Data File	94
Missing Value Handling	Definition of Missing	User-defined missing values are treated as missing.
	Cases Used	Statistics are based on cases with no missing values for any variable used.
Syntax		REGRESSION /MISSING LISTWISE /STATISTICS COEFF OUTS R ANOVA ZPP /CRITERIA=PIN(.05) POUT(.10) /NOORIGIN /DEPENDENT Gullibility /METHOD=ENTER Depressed /SCATTERPLOT= (*ZRESID ,*ZPRED) /RESIDUALS HISTOGRAM(ZRESID) NORMPROB(ZRESID).
Resources	Processor Time	00:00:00.59
	Elapsed Time	00:00:00.00
	Memory Required	2768 bytes
	Additional Memory Required for Residual Plots	896 bytes

Variables Entered/Removed^a

Model	Variables Entered	Variables Removed	Method
1	Depressed ^b	.	Enter

a. Dependent Variable: Gullibility

b. All requested variables entered.

Model Summary^b

Model	R	R Square	Adjusted R Square	Std. Error of the Estimate
1	.969 ^a	.939	.936	1.02900

a. Predictors: (Constant), Depressed

b. Dependent Variable: Gullibility

ANOVA^a

Model		Sum of Squares	df	Mean Square	F	Sig.
1	Regression	295.941	1	295.941	279.497	.000 ^b
	Residual	19.059	18	1.059		
	Total	315.000	19			

a. Dependent Variable: Gullibility

b. Predictors: (Constant), Depressed

Coefficients^a

Model		Unstandardized Coefficients		Standardized Coefficients	t	Sig.
		B	Std. Error	Beta		
1	(Constant)	-12.033	1.191		-10.105	.000
	Depressed	.250	.015	.969	16.718	.000

Coefficients^a

Model		Correlations		
		Zero-order	Partial	Part
1	(Constant)			
	Depressed	.969	.969	.969

a. Dependent Variable: Gullibility

Residuals Statistics^a


	Minimum	Maximum	Mean	Std. Deviation	N
Predicted Value	.4800	12.9934	7.5000	3.94662	20
Residual	-1.99016	2.00663	.00000	1.00155	20
Std. Predicted Value	-1.779	1.392	.000	1.000	20
Std. Residual	-1.934	1.950	.000	.973	20

a. Dependent Variable: Gullibility

Charts

Histogram

Dependent Variable: Gullibility

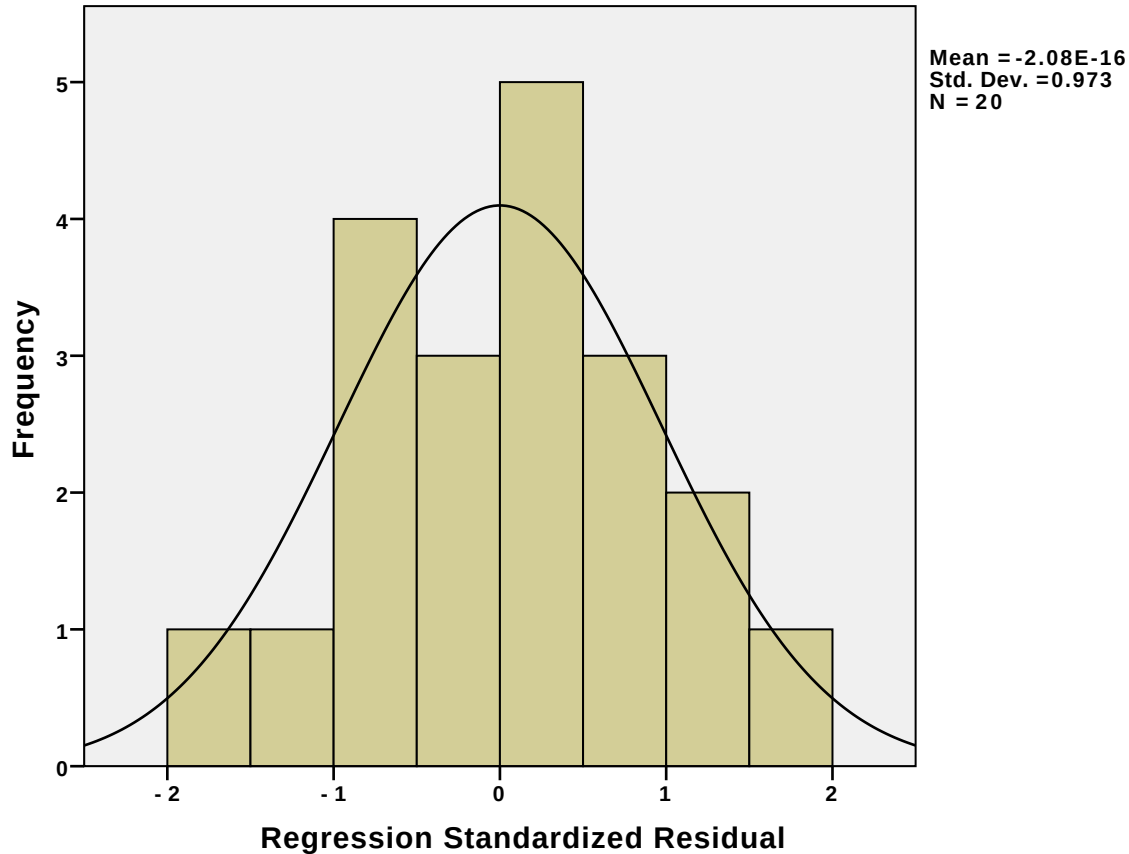

Normal P-P Plot of Regression Standardized Residual
Dependent Variable: Gullibility

